


| Dimensions [±5 mm] | EV 7/552 200 60 | EV 10/752 300 65 | EV 11/552 400 75 | EV 15/752 500 75 |
|-----------------------|-----------------|------------------|------------------|------------------|
| a [mm] | 585 | 718 | 775 | 944 |
| b [mm] | 478 | 610 | 617 | 750 |
| c [mm] | 993 | 1207 | 1156 | 1448 |
| d [mm] | 284 | 288 | 302 | 299 |
| e [mm] | 199 | 203 | 220 | 214 |
| f [mm] | 1200 | 1420 | 1407 | 1674 |
| g [mm] | 314 | 314 | 331 | 324 |
| i [mm] | 993 | 1207 | 1156 | 1448 |
| j [mm] | 628 | 760 | 813 | 986 |
| k [mm] | 671 | 803 | 858 | 1029 |
| l [mm] | 746 | 903 | 943 | 1165 |
| m [mm] | 1345 | 1563 | 1596 | 1838 |
| n [mm] | 886 | 1104 | 1073 | 1330 |
| p [mm] | 815 | 996 | 998 | 1265 |
| Ø C [mm] | 600 | 650 | 750 | 750 |
| Ø D [mm] | 500 | 550 | 650 | 650 |

section A-A

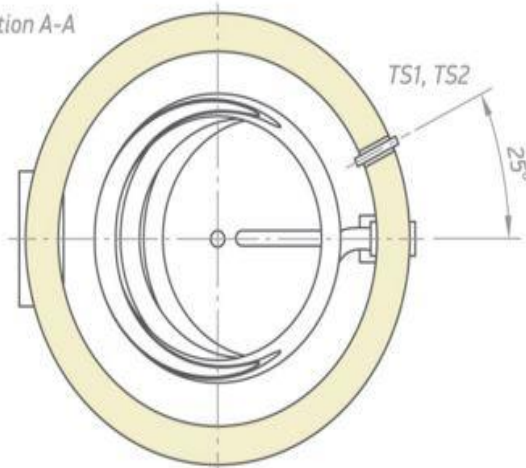

- CW - cold water inlet - G 1"
- HW - hot water outlet - G 1"
- IS1 - solar flow - G 1"
- IS2 - heating flow - G 1"
- OS1 - solar return - G 1"
- OS2 - heating return - G 1"
- TS1 - thermosensor 1 - G 1/2"
- TS2 - thermosensor 2 - G 1/2"
- R - recirculation - G 3/4"
- EE - opening for electrical element - G 1 1/2"
- T - thermometer - Ø 14 x 1.5
- TR - opening for thermoregulator - G 1/2"

Thread designations according to EN ISO 228-1/